

18.605 G

Submersible OEM-Pressure Transmitter

Applications

- ▶ level measurement in water and fuel oil tanks

Characteristics

- ▶ piezoresistive stainless steel sensor
- ▶ accuracy 0.5 % FSO according to IEC 60770
- ▶ nominal pressure ranges from 0 ... 1 mH₂O up to 0 ... 10 mH₂O



Technical Data



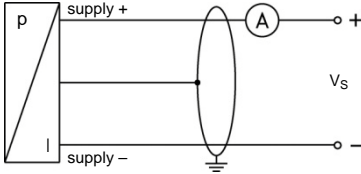
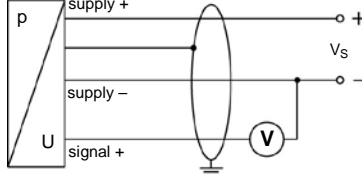
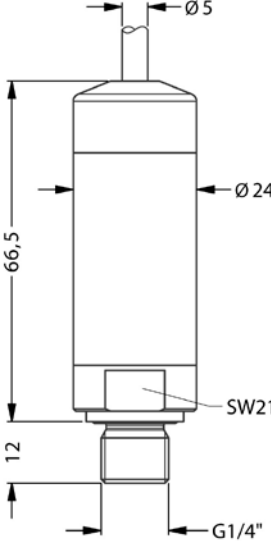
Input pressure range						
Nominal pressure gauge [bar]	0.1	0.25	0.4	0.6	1	
Level [mH ₂ O]	1	2.5	4	6	10	
Overpressure [bar]	1	1	1	3	3	
Burst pressure ≥ [bar]	1.5	1.5	1.5	5	5	
Vacuum resistance	unlimited					

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / V _S = 8 ... 32 V _{DC}
Option 3-wire	3-wire: 0 ... 10 V / V _S = 14 ... 30 V _{DC}
	3-wire ratiometric: 10 ... 90% of V _S / V _S = 2.7 ... 5 V _{DC}

Performance	
Accuracy ¹	P _N > 160 mbar: ≤ ± 0,5 % FSO P _N ≤ 160 mbar: ≤ ± 1 % FSO
Permissible load	2-wire: R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω 3-wire: R _{min} = 10 kΩ
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ
Response time	2-wire: ≤ 10 msec 3-wire: ≤ 3 msec
Long term stability	≤ ± 0.2 % FSO / year at reference conditions
Measuring range	1 kHz

¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (Offset and Span) / Permissible temperatures	
Thermal error	≤ ± 0.3 % FSO / 10 K in compensated range 0 ... 70 °C
Permissible temperatures	medium / electronics / environment / storage: -10 ... 70 °C
Electrical protection	
Short circuit protection	permanent 3-wire ratiometric: none
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	Emission and immunity according to EN 61326

Mechanical stability		
Vibration	10 g, 25 Hz ... 2 kHz	according to DIN EN 60068-2-6
Shock	100 g / 1 msec	according to DIN EN 60068-2-27
Materials (media wetted)		
Housing	stainless steel 1.4301 (304)	
Seals	FKM	
Diaphragm	stainless steel 1.4435 (316 L)	
Cable sheath	PVC (oil resistant)	
Miscellaneous		
Weight	approx. 120 g (without cable)	cable: 25 g / m
Cable length	3 m, 6 m, 9 m or 12 m; others on request	
Suitable for following media	water, fuel oil	
Current consumption	2-wire: max. 25 mA	3-wire ratiometric: typ. 1.5 mA
	3-wire voltage: typ. 5 mA (short circuit current: max. 20 mA)	
Ingress protection	IP 68	
CE-conformity	EMC Directive: 2014/30/EU	
Wiring diagrams		
<p>2-wire-system (current)</p> 		<p>3-wire-system (voltage)</p> 
Pin configuration		
Electrical connections	cable colours (DIN 47100)	
Supply +	wh (white)	
Supply -	bn (brown)	
Signal + (only for 3-wire)	gn (green)	
Shield	gn/ye (green / yellow)	
Dimensions (in mm)		
 <p>G1/4" DIN 3852 with PVC cable (with air tube)</p>		

© 2016 BD/SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code 18.605 G

18.605 G - - - - - - - -

Input	[mH ₂ O]	[bar]																		
	1.0	0.1	1	0	0	0														
	2.5	0.25	2	5	0	0														
	4	0.4	4	0	0	0														
	6	0.6	6	0	0	0														
	10	1.0	1	0	0	1														
	customer		9	9	9															consult
Pressure																				
	bar																			B
	mH ₂ O																			M
	customer																			9
Output																				
	4 ... 20 mA / 2-wire																			1
	0 ... 10 V / 3-wire																			3
	10 ... 90% of V _S / 3-wire ratiometric																			R
	customer																			9
Accuracy																				
P _N > 160 mbar:	≤ ± 0.5 % FSO																			5
P _N ≤ 160 mbar:	≤ ± 1 % FSO																			8
	customer																			9
Electrical connection																				
	PVC-cable																			1
	customer																			9
Cable length																				
	3 m																			0
	6 m																			0
	9 m																			0
	12 m																			0
	customer																			9
Mechanical connection																				
	G1/4" DIN 3852																			3
	customer																			9
Seals																				
	FKM																			1
	customer																			9
Special version																				
	standard																			0
	customer																			9

© 2016 BD|SENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

